


Flat Casing 500





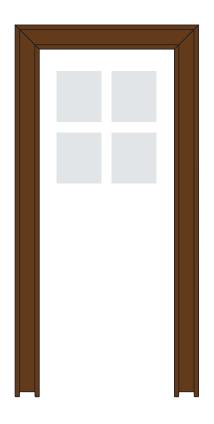

NOMINAL DIMENSIONS	FINISH	ACTUAL DIMENSIONS	INSTALLATION
4"	Smooth	1 1/8" x 4"	Horizontally and vertically

General Specifications

SPECIES

· Finger-jointed pine

PACKAGING

 Pieces of 10 feet (3,05 m) sold by pair (2 x 10 feet).

AVAILABLE COLOURS

- Solid colours (2 coats). Unlimited choice of solid colours, with our TrueMatch® system.
- This moulding is not available in natural tones. However, it is available in the equivalent solid colours.

FACTORY-STAINING

- The stain is factory-coated on all six sides in a controlled environment for maximum stain absorption and retention. This also provides increased protection from the damaging effects of the sun and the elements.
- Low-volatile organic compounds (VOCs) water-based stains.

For exterior use only.



Flat Casing 500 (suite)

Installation System

NAILS

- Use Maibec 2" hot-dipped zinc galvanized or stainless steel flat textured head ring shank nails that are corrosion resistant and colour-matched to the siding or for the first and last course.
- A plastic hammer end cap is provided to protect the wood.
- 10 lbs needed per 1,000 fbm.

For the Îles-de-la-Madeleine and coastal regions[†], see the Installation guide available on our website at maibec.com under the SUPPORT tab.

Installation

Maibec® mouldings must be installed over a standard 16" (406 mm) on centre stud built wall with OSB (Oriented Strand Board) sheathing or plywood, and an approved breather membrane. Use 1" x 3" (25 x 76 mm) furring strips. They must be kiln-dried, straight, without splits

or nail holes to ensure a proper fastening base. Consult the building codes applicable in your region. See the Installation guide available on our website at maibec.com under the SUPPORT tab.

How to Calculate

Add a minimum of 5% to the amount for losses due to cutting.