
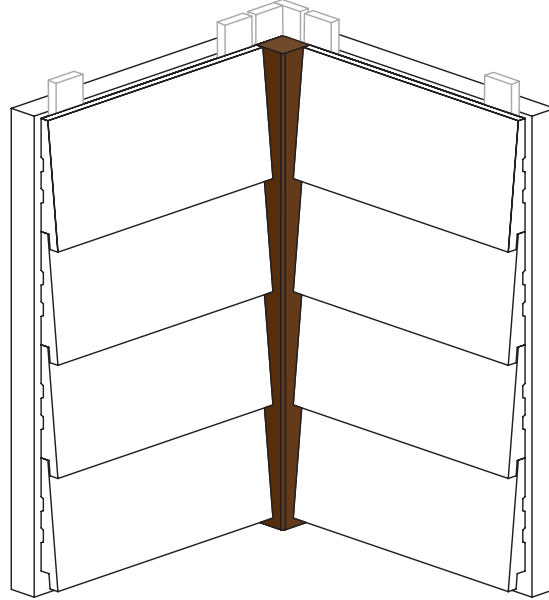


# Inside Corner



NOMINAL DIMENSION	FINISH	ACTUAL DIMENSIONS	INSTALLATION
2"	Smooth	1 3/8" x 1 3/8"	Vertically

## General Specifications

### SPECIES

- Spruce - Fir (SPF) / Sound tight knot

### MANUFACTURING

- Kiln-dried (KD) between 12% to 16% humidity

### PACKAGING

- Random lengths 6' to 12' in bundles
- No specific length for this item

### AVAILABLE COLORS

- Selection of solid colors (2 coats)
- This trim is not available in Natural tones. However, it is available in the equivalent solid colors.

### FACTORY-STAINING

- The stain is factory-coated on all six sides in a controlled environment for maximum stain absorption and retention. This also provides increased protection from the damaging effects of the sun and the elements.
- Low-volatile organic compounds (VOCs) water-based stains.



FSC® mix certified siding available upon request.

For exterior use only.

# Inside Corner

## Preparing the Wall for Installation

Maibec® trim must be installed over a standard 16" on centre stud built wall with OSB (Oriented Strand Board) sheathing or plywood, and an approved weather barrier. Use 1" x 4" furring strips (1" x 3" strips are acceptable). They must be kiln-dried, straight, without splits or nail

holes to ensure a proper fastening base. Consult the applicable building codes in your region. See the Installation guide available on our website at [maibec.com/us](http://maibec.com/us) under the SUPPORT tab.

## Installation System

### NAILS

- Use Maibec 3" hot-dipped zinc galvanized ring shank nail with textured head, factory-stained to match the siding color.
- Use 2 1/2" coil nails for pneumatic nailers for trim. Make sure to check nail gun compatibility. Not color-matched.
- Use unstained stainless steel grade 316 ringed nails if installing regular Maibec trim in Coastal regions†.
- A plastic hammer end cap is provided to protect the wood.
- 10 lbs needed per 1,000 fbm.

## How to Calculate

Add a minimum of 5% to the amount for losses due to cutting.

**WARRANTY\* - SIDING  
TEXTURED FACE**

<b>25</b> YEARS against wood decay	<b>10</b> YEARS on solid stain 2 coats <small>COASTAL REGIONS: 8 YEARS</small>
<b>3</b> YEARS on labor	