
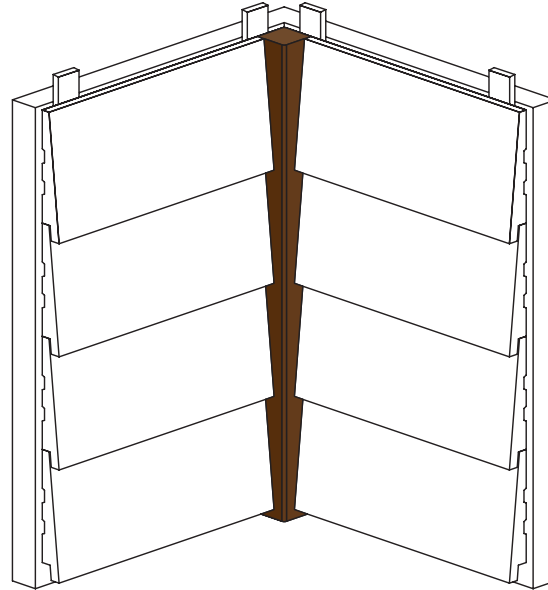


# Inside Corner



| NOMINAL DIMENSIONS | FINISH | ACTUAL DIMENSIONS | INSTALLATION                |
|--------------------|--------|-------------------|-----------------------------|
| 2"                 | Smooth | 1 3/8" x 1 3/8"   | Horizontally and vertically |

## General Specifications

### SPECIES

- Spruce - Fir (SPF) / Sound tight knot

### MANUFACTURING

- Kiln-dried (KD) between 12% to 16% humidity.

### PACKAGING

- Random lengths 6' to 12' (1,83 m to 3,66 m) in bundles. No specific length for this item.

### AVAILABLE COLOURS

- Solid colours (2 coats). Unlimited choice of solid colours, with our TrueMatch® system.
- This moulding is not available in natural tones. However, it is available in the equivalent solid colours.

### FACTORY-STAINING

- The stain is factory-coated on all six sides in a controlled environment for maximum stain absorption and retention. This also provides increased protection from the damaging effects of the sun and the elements.
- Low-volatile organic compounds (VOCs) water-based stains.



FSC® mixed sources certified siding available upon request.

For exterior use only.

## Inside Corner (cont'd)

### Installation System

#### NAILS

- Use Maibec 2" hot-dipped zinc galvanized or stainless steel flat textured head ring shank nails that are corrosion resistant and colour-matched to the siding or for the first and last course.
- A plastic hammer end cap is provided to protect the wood.
- 10 lbs needed per 1,000 fbm.

For the Îles-de-la-Madeleine and coastal regions†, see the Installation guide available on our website at [maibec.com](http://maibec.com) under the SUPPORT tab.

### Installation

Maibec® mouldings must be installed over a standard 16" (406 mm) on centre stud built wall with OSB (Oriented Strand Board) sheathing or plywood, and an approved breather membrane. Use 1" x 3" (25 x 76 mm) furring strips. They must be kiln-dried, straight, without splits

or nail holes to ensure a proper fastening base. Consult the building codes applicable in your region. See the Installation guide available on our website at [maibec.com](http://maibec.com) under the SUPPORT tab.

### How to Calculate

Add a minimum of 5% to the amount for losses due to cutting.

#### WARRANTY\* – SIDING TEXTURED FACE



\* SOME RESTRICTIONS APPLY. SEE DETAILED WARRANTIES.

† APPLICABLE COASTAL REGIONS INCLUDE THOSE LOCATED LESS THAN 600 M (2,000 FEET) FROM THE COASTLINE IN THE ATLANTIC PROVINCES (NEW BRUNSWICK, PRINCE EDWARD ISLAND, NOVA SCOTIA, NEWFOUNDLAND AND LABRADOR), SAINT-PIERRE-ET-MIQUELON, AND IN THE U.S. EAST COAST STATES.

® REGISTERED TRADE-MARK PROPERTY OF MAIBEC INC. ™ TRADE-MARK PROPERTY OF MAIBEC INC.  
© COPYRIGHT - MAIBEC INC. PRINTED IN CANADA FEBRUARY 2016 B1616309A