


# Individual Shingles

RESQUARED AND REBUTTED. NATURAL (KILN DRIED) OR FACTORY-STAINED.

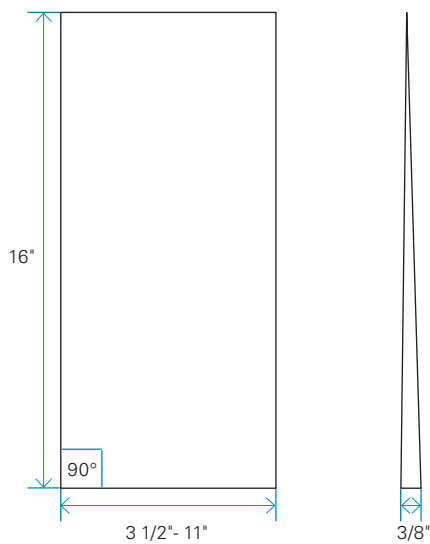

STAIN	GRADE	BUTT THICKNESS	WIDTH	NOMINAL LENGTH	INSTALLATION
Solid stain 2 coats	Nantucket™ Kennebunk™	3/8"*	3 1/2"-11"*	16"*	Sidewall use
	Bar Harbor™	3/8"*	3"-11"*	16"*	Sidewall use
Semi-transparent Spice series	Nantucket™ Kennebunk™	3/8"*	3 1/2"-11"*	16"*	Sidewall use
	Bar Harbor™	3/8"*	3"-11"*	16"*	Sidewall use
H2BO water-based bleaching stain - 1 coat	Nantucket™ Kennebunk™	3/8"*	3 1/2"-11"*	16"*	Sidewall use

## General Specifications

### SPECIES:

- Eastern White Cedar – *Thuja occidentalis*

### MANUFACTURING

- Stellite-tipped blades: minimize raised grain
- Kiln-dried to 12% - 16% moisture content

### PACKAGING AND COVERAGE

- Each box covers around 25 sq. ft at 5" exposure.

### AVAILABLE COLORS

- Maibec solid stain color chart
- Semi-transparent Spice series
- Unlimited choice of solid colors thanks to our TrueMatch® system
- H2BO water-based bleaching stain (one coat)

### FACTORY-STAINING

- Every shingle is factory-coated on all sides in a controlled environment for maximum stain absorption and retention. This also provides increased protection from the damaging effects of the sun and the elements.

- Following the stain application, the shingles are sent through a state of the art drier for curing. The product of European technology, this drier cures the stain from the inside out. The shingles are then cooled down and packaged. This unique system increases the durability of the product once installed.
- Low-volatile organic compounds (VOCs) water-based stains.



FSC® mix certified shingles available upon request.

For exterior use only.

\* DIMENSIONS MAY VARY DUE TO KILN-DRYING.


# Individual Shingles

## Preparing the Wall for Installation

### FASTENING REFERENCE LINE

Maibec shingles feature a fastening reference line found 6 1/4" from the base of the shingle. For the 5" required shingle exposure, fasten just below the reference line to respect the installation requirement. Each individual shingle is marked on one side.

See the Maibec Shingles installation guides to know all installation requirements.



## Installation System

### STAPLES

- Stainless steel or aluminum staple with minimum 7/16" crown, minimum 16 gauge
- Two fasteners per shingle, regardless of its width

### NAILS

- Stainless steel or hot dipped galvanized
- Ring shank blunt tip nail with minimum 7/32" head
- Two fasteners per shingle, regardless of its width

## How to Calculate

### HOW TO CALCULATE THE AMOUNT OF SIDING NEEDED

Example – Area to cover: 1,000 ft<sup>2</sup>

For 5" exposure, add 3% to the area to cover

$$1,000 \text{ ft}^2 \times 1.03 = 1,030 \text{ ft}^2$$

$$1 \text{ box} = 25 \text{ ft}^2$$

$$1,030 \text{ ft}^2 = 41 \text{ boxes}$$

### WARRANTY\* – SHINGLES SOLID STAIN

**50** YEARS against wood decay  
**20** YEARS on solid stain 2 coats  
**10** YEARS on solid stain one coat

**7** YEARS on labor on solid stain 2 coats

### WARRANTY\* – SHINGLES "SPICE" SERIES

**50** YEARS against wood decay  
**3** YEARS on semi-transparent stain 2 coats

**3** YEARS on labor

### WARRANTY\* – SHINGLES H2BO

**30** YEARS against wood decay