


# Maibec<sup>®</sup> Wides

RESQUARED AND REBUTTED. NATURAL (KILN DRIED) OR FACTORY-STAINED.

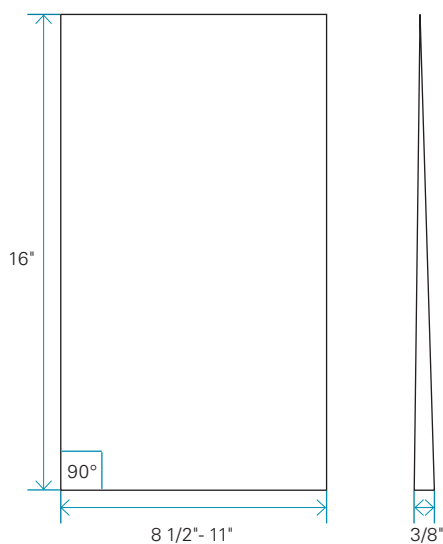

STAIN	GRADE	BUTT THICKNESS	WIDTH	NOMINAL LENGTH	INSTALLATION
Solid stain 2 coats	Nantucket <sup>™</sup>	3/8"*	8 1/2"-11"*	16"*	Sidewall use
Semi-transparent Spice series	Nantucket <sup>™</sup>	3/8"*	8 1/2"-11"*	16"*	Sidewall use

## General Specifications

### SPECIES:

- Eastern White Cedar – *Thuja occidentalis*

### MANUFACTURING

- Stellite-tipped blades: minimize raised grain
- Kiln-dried to 12% - 16% moisture content

### PACKAGING AND COVERAGE

- Available in pre-boxed 8 1/2" to 11" shingles
- 1/2 box for every 15 boxes

### AVAILABLE COLOURS

- Maibec solid stain colour chart
- Semi-transparent Spice series
- Unlimited choice of solid colours thanks to our TrueMatch<sup>®</sup> system

### FACTORY-STAINING

- Every shingle is factory-coated on all sides in a controlled environment for maximum stain absorption and retention. This also provides increased protection from the damaging effects of the sun and the elements.
- Following the stain application, the shingles are sent through a state of the art drier for

curing. The product of European technology, this drier cures the stain from the inside out. The shingles are then cooled down and packaged. This unique system increases the durability of the product once installed.

- Low-volatile organic compounds (VOCs) water-based stains.



FSC<sup>®</sup> mix certified shingles available upon request.

For exterior use only.


# Maibec® Wides

## Installation

### FASTENING REFERENCE LINE

Maibec shingles feature a fastening reference line found 6 1/4" from the base of the shingle. For the 5" required shingle exposure, fasten just below the reference line to respect the installation requirement.

See the Maibec Shingles installation guides to know all installation requirements.



## Installation System

### STAPLES

- Stainless steel or aluminum staple with minimum 7/16" crown, minimum 16 gauge
- Two fasteners per shingle, regardless of its width

### NAILS

- Stainless steel or hot dipped galvanized
- Ring shank blunt tip nail with minimum 7/32" head
- Two fasteners per shingle, regardless of its width

## How to Calculate

### HOW TO CALCULATE THE AMOUNT OF SIDING NEEDED

Example – Area to cover: 1,000 ft<sup>2</sup>

**For 5" exposure, add 3% to the area to cover**

$$1,000 \text{ ft}^2 \times 1.03 = 1,030 \text{ ft}^2$$

$$1 \text{ box} = 25 \text{ ft}^2$$

$$1,030 \text{ ft}^2 = 41 \text{ boxes}$$

### WARRANTY\* – SHINGLES SOLID STAIN

**50** **15**  
YEARS YEARS  
against on solid  
wood decay stain 2 coats

**5** YEARS  
on labour

### WARRANTY\* – SHINGLES "SPICE" SERIES

**50** **3**  
YEARS YEARS  
against on semi-  
wood decay transparent  
stain 2 coats

**3** YEARS  
on labour