

# Maibec® Wides Installation Guide

Read this entire guide before installing your Maibec Wides. For proper installation, you must understand and follow all requirements and steps correctly. For any questions, please contact Maibec's technical service toll-free at 1 800 363-1930, Monday to Friday from 8:30 a.m. to 4:30 p.m. (Eastern Time).

**IMPORTANT: COMPLIANCE WITH MAIBEC'S INSTALLATION, STORAGE AND MAINTENANCE REQUIREMENTS, AND WITH ALL APPLICABLE BUILDING CODES IS MANDATORY. PROBLEMS CAUSED BY FAILURE TO COMPLY WITH THESE REQUIREMENTS AND CODES MAY NOT BE COVERED BY THE APPLICABLE WARRANTIES.**

**Factory-stained white cedar wide shingles can only be installed to exterior wall surfaces.**

Shingles have one side that is smoother and more uniform than the other. Be sure to install them with this side facing outward.

*All dimensions in this document are given in inches.*

## 1. STORAGE

- Store the shingle siding in an unheated, dry and ventilated area.
- Leave wide shingle boxes on pallet. Do not store the material in direct contact with the ground or a cement floor.
- Always cover the uninstalled material after a day's work.


## 2. INSTALLATION

Ranging from 8 1/2" to 11", a portion of the wides in a given Nantucket™ custom colour order are packaged in a clearly identified box, eliminating the need to set them aside as normally done with traditionally bundled boxes. This will save the installer time as it removes this additional handling, which will in turn protect the coating from scrapes on the prefinished material. It will also reduce the number of cuts required.

If you trim a wide shingle, apply **touch-up stain** on all cuts.

If the number of wides provided exceeds the lineal feet of rakes and cheeks, simply reintroduce them into the normal wall application.

### GABLE

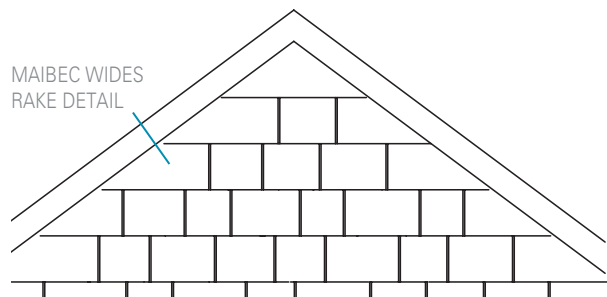

### DORMER

