


Individual Shingles

RESQUARED AND REBUTTED. NATURAL (KILN DRIED) OR FACTORY-STAINED.

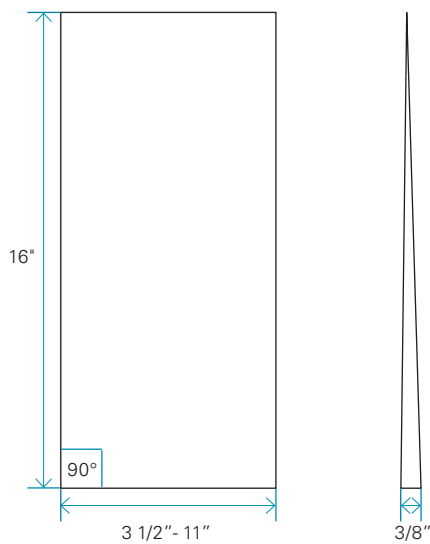

STAIN	GRADE	BUTT THICKNESS	WIDTH	NOMINAL LENGTH	INSTALLATION
Solid stain 2 coats	Nantucket™	3/8" (9,5 mm)*	3 1/2"-11" (89 mm - 279 mm)*	16" (406 mm)*	Sidewall use
	Bar Harbor™	3/8" (9,5 mm)*	3"-11" (76 mm - 279 mm)*	16" (406 mm)*	Sidewall use
Semi-transparent "Spice" series	Nantucket™	3/8" (9,5 mm)*	3 1/2"-11" (89 mm - 279 mm)*	16" (406 mm)*	Sidewall use
	Bar Harbor™	3/8" (9,5 mm)*	3"-11" (76 mm - 279 mm)*	16" (406 mm)*	Sidewall use

General Specifications

SPECIES:

- Eastern White Cedar – *Thuja occidentalis*

MANUFACTURING

- Stellite-tipped blades: minimize raised grain.
- Kiln-dried to 12% - 16% moisture content.

PACKAGING AND COVERAGE

- Each box covers around 25 sq. ft at 5" (127 mm) exposure.

AVAILABLE COLOURS

- Maibec solid stain colour chart.
- Semi-transparent "Spice" series.
- Unlimited choice of solid colours thanks to our TrueMatch® system.

FACTORY-STAINING

- Every shingle is factory-coated on all sides in a controlled environment for maximum stain absorption and retention. This also provides increased protection from the damaging effects of the sun and the elements.
- Following the stain application, the shingles are sent through a state of the art drier for

curing. The product of European technology, this drier cures the stain from the inside out. The shingles are then cooled down and packaged. This unique system increases the durability of the product once installed.

- Low-volatile organic compounds (VOCs) water-based stains.



FSC® mixed sources certified shingles available upon request.

For exterior use only.

* DIMENSIONS MAY VARY DUE TO KILN-DRYING.

Individual Shingles

Installation System

STAPLES

- Stainless steel or aluminum staple with minimum 7/16" (1.12 cm) crown, minimum 16 gauge.
- Two fasteners per shingle, regardless of its width.


NAILS

- Stainless steel or hot dipped galvanized
- Ring shank blunt tip nail with minimum 7/32" (0.56 cm) head
- Two fasteners per shingle, regardless of its width.

Installation

FASTENING REFERENCE LINE

Maibec shingles feature a fastening reference line found 6 1/4" from the base of the shingle. For the 5" recommended shingle exposure, fasten just below the reference line to respect the installation requirement. Each individual shingle is marked on one side.



How to Calculate

HOW TO CALCULATE THE AMOUNT OF SIDING NEEDED

Example – Area to cover: 1,000 ft²

For 5" exposure, add 3% to the area to cover.

$$1,000 \text{ ft}^2 \times 1.03 = 1,030 \text{ ft}^2$$

$$1 \text{ box} = 25 \text{ ft}^2$$

$$1,030 \text{ ft}^2 = 41 \text{ boxes}$$

WARRANTY* – SHINGLES SOLID STAIN

50 YEARS
against wood decay

15 YEARS
on solid stain 2 coats

5 YEARS
on labour

WARRANTY* – SHINGLES "SPICE" SERIES

50 YEARS
against wood decay

3 YEARS
on semi-transparent stain 2 coats

3 YEARS
on labour