



"H" Joint Moulding

6" and 8"

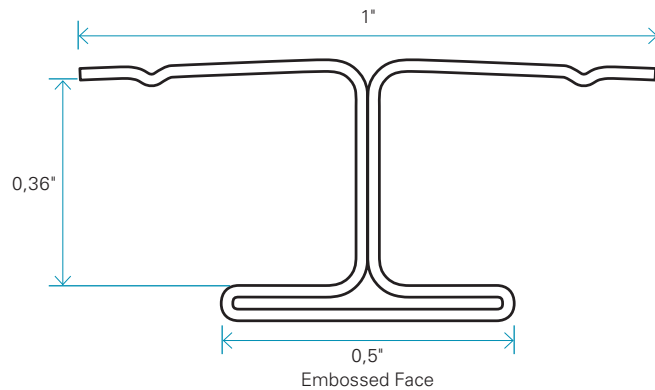

FINISH	ACTUAL DIMENSIONS	LENGTH	INSTALLATION
Aluminum	3/8" x 1/2"	6"	Vertically
Aluminum	3/8" x 1/2"	8"	Vertically

General Specifications

Aluminum "H" Joint Moulding used to hide the gap between two runs of Maibec Resistech™ lap siding. Substitute to sealant joints between lap siding boards. Offer a solution for custom colour joints.

PACKAGING

- Sold in pack of 20 mouldings.

AVAILABLE COLOUR

- Available in custom and trend program colours.

For exterior use only.

INSTALLATION

- Leave a spacing of 1/4" between 2 laps siding. This spacing is necessary for the installation of the "H" joint moulding.

RATIO*

- Allow 80 6" H-joint mouldings for 1 000 sq. ft. of 6" lap siding.
- Allow 60 8" H-joint mouldings for 1 000 sq. ft. of 8" lap siding.

* These ratios are for indication purpose and may vary based on the building architecture.